

TOSHIBA



| xd2000

Originals are detected
by design and brilliance.

- Attractive design
- High security (password function and panellock)
- Easy set-up and "easy to use"



LCD stands for
Liquid Cristal Display



xd2000

Immerse yourself
in a world of colour.

Display 0,61" LCD Chip

Resolution XGA 1,024 x 768

Brightness 2,000 ANSI-lumens

Colour reproduction 16.7 mio. colours

Contrast 600 : 1

Projection format 4 : 3 switchable to 16 : 9

Lamp 180 W (TLPLW11LAMP)

Max. lamp life up to max. 2,000 hours/
um to max. 3.000 hours in ECO mode

Lens F = 1.6 - 1.89 / f = 18.6 - 22.3 mm,
manual zoom and focus

Zoom 1.2 x

Frequency (hor./vertical) 16 - 106 kHz / 50 - 85 Hz

Projection front, rear and ceiling

Digital keystone correction auto vertikal +/- 30°

Picture size (diagonal) 0.84 m - 7.62 m

Projection distance 1.19 m - 9.13 m

Input signals NTSC / PAL / SECAM, 480i, 480p, 576i, 576p,
720p, 1,080i, VGA / SVGA, XGA / SXGA / UXGA (compr.)

Inputs RGB (D-sub 15), S-video, composite video (1 x RCA),
RGB audio (stereo mini jack), video / S-video audio (1 x RCA L/R)

Outputs RGB (D-sub 15), audio (stereo mini jack)

Serial interface RS-232C (mini DIN8 pin)

Power supply AC 100 - 240 V, 50 / 60 Hz

Loudspeaker 1 W mono

Dimensions (W x H x D) 288 x 92 x 247 mm


Weight 2.8 kg

Operation noise standard 34 dB / ECO mode 29 dB

Specials security-function, user logo, password, panellock,
quick start / instant shut down (5 sec.), black board-function

Accessories remote control with batteries, owners
manual (CD ROM), quick reference, RGB and power cable,
softcase

Options ceiling mounting, trolley, spare lamp, camera c001

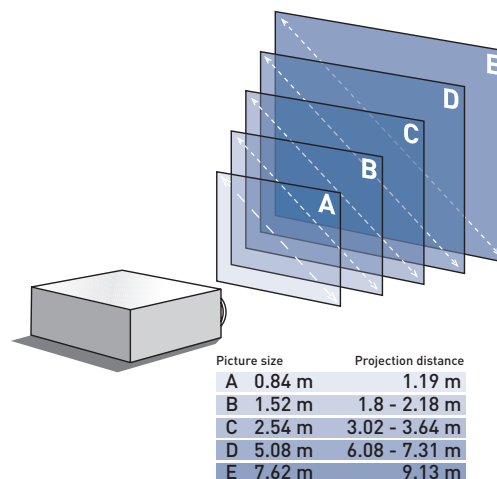

www.toshiba-europe.com/projectors

Toshiba Europe GmbH
Projection & Display Technology
Phone: ++49-2131-158-01 • Fax: ++49-2131-158-835
e-mail: projektoreninfo@toshiba-teg.com